



广州恒宽机械有限公司

Canton Hostandard Machinery CO., LTD

www.pocket-spring.com




Email: hostandard@hotmail.com

Mob: 0086-133-1411-7277

Skype: northland99

双锥弹簧生产机 **Bonnell spring coiler HS-BSC60**

Photo Details

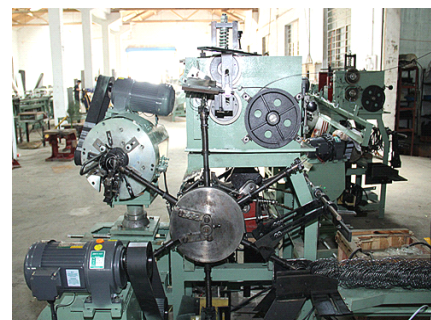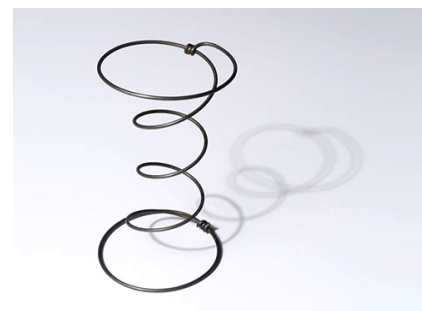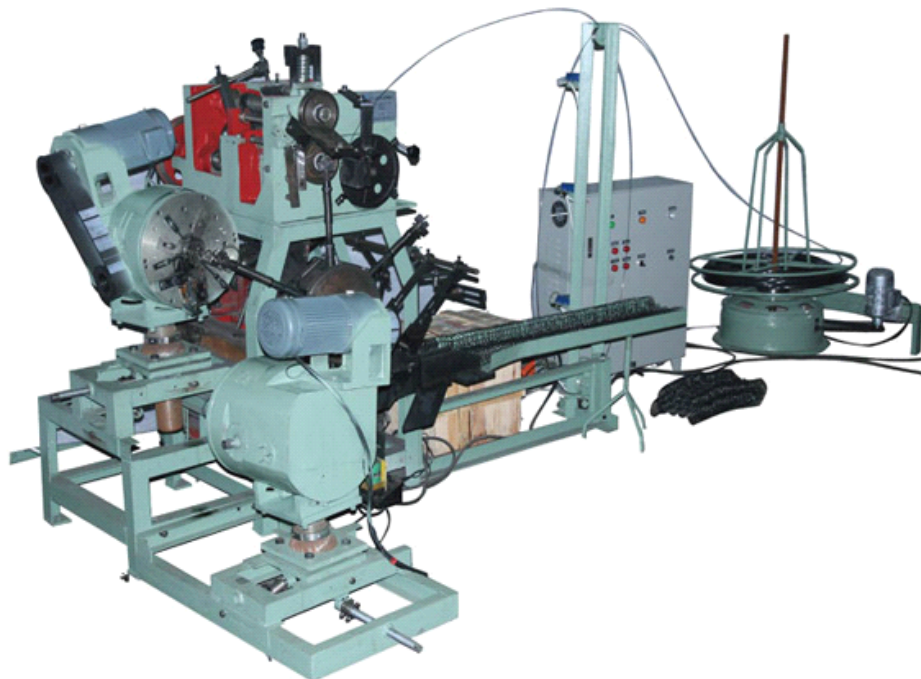

video weblink:<http://u.youku.com/northland99>

Technical Information:

Performance 生产效率

production capacity	生产速度(只/分钟)	55 springs/min
---------------------	------------	----------------

Consumptive Material Specs 耗材参数

steel wire 钢丝	wire gauge	钢丝直径	1.8--2.4mm
	Iner Dia. of wire roll	钢丝卷内径	Min/最小300mm
	Outer Dia. of wire roll	钢丝卷外径	Max/最大700mm
	Max weight of wire roll	钢丝卷重量	Max/最大250kg (optional:1000kg)

General Data 一般参数

Spring type	弹簧形状	Bonnell(双锥形)
Spring Dia.	端圈外径	65--93mm
Spring Height	弹簧高度	80--220mm (需要不同模具defferent parts required)
Spring turn	弹簧圈数	4-8n
Main Drive Power	主功率	4.5KW
Wire rack Power	线架功率	1.1KW
Heat Treatment Power	热处理功率	15KW(瞬间)
Weight	重量	Approx/约1500kg
Power Requirements	电源需求	Three Phase-380V, single phase 220V 50 - 60 HZ

Footprint 占用空间			
AFTER-SALE SERVICE 售后服务		PACKAGING INFO 包装信息	
installation:	new machine installation free	packing material:	wood or plywood
	expenditures of way and accommodation paid by customer.	package count:	
		Packing dimensions:	
warranty:	1 year	Volume:	
	spare parts and after-sale service will be offered for life	gross weight:	
spare parts:	spare parts list offered.	net weight:	
ADDITONAL COMMENTS&REMARK			
*Payment terms: T/T 30% deposit in advance, balance 70% 3 days before shipment.			
*Agent policy: in some countries or areas, you can ask our agent for efficient service.			